


RLSB250 Single-Ended Beam, Stainless Steel

Welded-seal, NTEP 1:5000 Class III Multiple Cell, IP67

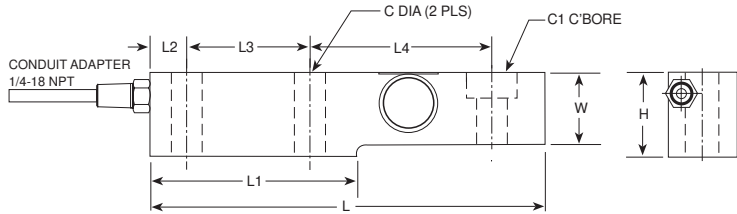

Picture is a representation of actual product

RATED CAPACITY	DIMENSIONS									
	C	C1	H	L	L1	L2	L3	L4	W	
lb/inches										
2500	.53	.68 THRU C'BORE 1.19x.47DP	1.88	8.00	4.00	.75	2.50	3.88	1.44	
kg/mm										
1134.0	13.5	.68 THRU C'BORE 1.19x.47DP	47.8	203.2	101.6	19.1	63.5	98.6	36.6	

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Seal Type:	Welded-seal, IP67
Material/Finish:	Stainless steel	Cable Length:	20'/6.2 m
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Green..... + Excitation Black..... - Excitation White..... + Signal Red..... - Signal
Safe Overload:	150% Full scale	Warranty:	2-year limited warranty
Rated Excitation:	10V DC (15V maximum)		
Combined Error:	0.02%		
Non-repeatability:	0.01% Full scale		

RLSB250 ORDER INFORMATION

Load Rating	Part #	Price
2500 lb (1134.0 kg)	34482	\$600.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Cardinal®	SB2500* <i>*Thru hole design</i>

WEIGH MODULE AVAILABLE

Model	Page #
Mount Kit RL1900	44