


Star® TUP900 Direct Thermal Kiosk Mechanism



Approvals

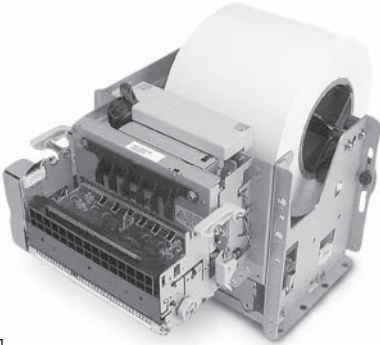

Standard Features

- Looping presenter virtually eliminates paper jams with options
- Modular design for easy mounting/integration
- Semi-automatic paper loading
- Serial, parallel and USB interfaces available
- 203 dpi resolution
- Graphics printing
- Adjustable print width
- 150 mm/sec print speed

Specifications

PAPER WIDTH:

80-112mm (adjustable)

PAPER THICKNESS:

0.065-0.15

PAPER DIAMETER:

Outer max. 150 (Max. 250 with large paper roll holder)

PAPER ROLL SHAFT:

One inch (standard)

LOW PAPER SENSOR:

Included, adjustable

BLACK MARK SENSOR:

Included (label & ticket printing)

INTERFACE:

IFBD-HC04 (parallel)
IFBD-HN04 (9-pin serial)
IFBD-HU04 (USB)

OPERATION PANEL:

Included with package

SAFETY STANDARDS:

CD marking, FCC Class A, VCCI Class A (not included-UL/C-UL/C-tick/TUV)

DIMENSIONS:

192 (W) x 289.5 (D) x 207 (H) (with paper)
192 (W) x 249.3 (D) x 179 (H) (without paper)

PRINT METHOD:

Direct thermal single & two-color printing (with special paper)

PRINT RESOLUTION:

203dpi (8 dots/mm)

PRINT SPEED:

150mm/sec

PRINT WIDTH:

72-104mm (adjustable)

AUTOCUTTER:

Full-cut, guillotine style

PRESENTER OPTION:

Looping presenter with document capture & long journal mode

DRIVERS:

Windows, MAC OS X, Linux, OPOS, JavaPOS

POWER REQUIRED:

24 vdc

Windows is a registered trademark of Microsoft Corporation

PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
90975	TUP992-24Kiosk printer with presenter*		\$750.00
102948	TUP492-24 kiosk printer with cutter*		675.00
Options/Accessories			
90986	Universal power supply*		75.00
90985	Large paper roll holder unit		85.00
102950	Paper, 4.4 in 6 in OD		25.00
Interfaces			
102930	Parallel interface		60.00
102931	9-pin serial interface		60.00
102932	USB interface		75.00

*NOTE: Interface and power supply are ordered separately. Not included with printer.